


Our Thermal Foams also called Graphic Interfaces are silicone-based thermo-conductive materials that solve the problems of heat dissipation. TFO\_030\_O is a specially developed heat insulating silicone sheet for applications where low cooling requirements are required. Indeed, it is an excellent thermal conductor of 3W/mK, with good thermal resistance thus facilitating the transfer of heat and which does not have electrical insulation. We can cut according to customer plan. All our mattresses are certified UL 94 in V0.

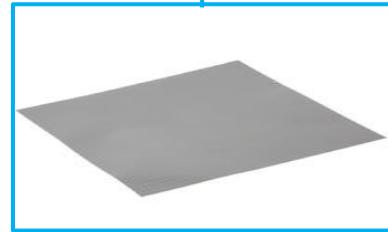


**Application Areas:** Electronic components - Electric Vehicles, 5G, Autopilot System, Mobile Phone, AIOT, HPC (High Performance Computing), Server, IC, CPU, MOS, LED, Mother Board, Power Supply, Heat Sink, LCD-TV, Notebook, PC, Telecom Device, Wireless Hub, DDR Module, etc.

## ⊕ Technical Characteristics

Features	Units	TFO_030_O			
<b>Thickness</b>	mm	0.20	0.30	0.45	-
<b>Reinforcement</b>	-	Fiberglass			
<b>Color</b>	-	Gray			
<b>Tensile strength</b>	kpsi	3.3	2.3	1.6	
<b>Size</b>	mm	Roll 300mm x 50M		Roll 300mm x 25M	Sheet
<b>Resistance @150 Psi</b>	°C-inch <sup>2</sup> /W	0.22	0.30	0.38	-
<b>Resistance @30 Psi</b>		0.55	0.60	0.70	-
<b>Thermal Conductivity</b>	W/mK	3.0			
<b>Temperature</b>	°C	-40 to 180			
<b>Breakdown voltage</b>	kV/AC	5.0	7.0	8.0	-
<b>Volume resistance</b>	0hm - cm	$9.2 \times 10^{13}$	$8.8 \times 10^{13}$	$3.4 \times 10^{12}$	-
<b>Contante dielectric</b>	@1MHz	4.8	5.6	6.2	-

**The TFO\_030\_O is available in 0.20/0.30/0.45mm thicknesses.**

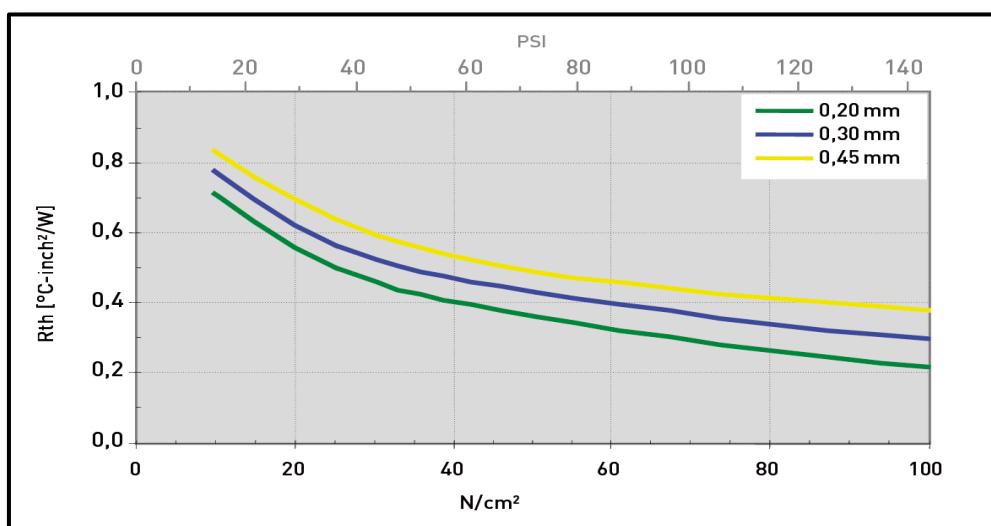

The results were obtained under laboratory conditions and should be considered only as a guide. As AB2E has no control over its customers' hardware and many other factors, it is the user's responsibility to perform their own tests to ensure that the product meets their needs.

