

Thermal Pad

Our Thermal Foam also called Gap Pad or Gap Filler are silicone-based thermo-conductive materials that solve the problems of heat dissipation. The TGF_125_AB is a mattress specially developed for applications where an intense cooling need is required. Indeed, this is an excellent thermal conductor of 12.5 W/mK, with a very low thermal resistance thus facilitating the transfer of heat and which also has excellent electrical insulation as well as excellent compressibility for a mattress high-end. Below 1mm, the mattress is difficult to use in pick-in-place for robotic production, in this case it will be necessary to provide an adjustment of its hardness to around 55-75 sh before use. We can cut out according to customer plan.




Application areas: Electronic components - Electric vehicles, 5G, Automatic driving system, Mobile phone, AIOT, HPC (High Performance Computing), Server, IC, CPU, MOS, Motherboard, Power supply, Heat sink, LCD-TV, laptop, PC, telecom device, wireless hub, DDR II module, etc.

Technical Characteristics

Features	TGF_125_AB	Unit	Tolerance	Test Method
Color	Green	-	-	Colorimètre CIE 1976
Density	3.3	g/cm ³	+/- 5%	ASTM D792
Thickness	0.5-8.0	mm	-	ASTM D374
Hardness	55	shore 00	+/- 10%	ASTM D2240
Sizes	310*310	mm	-	-
Thermal conductivity	12.5	W/mK	+/- 10%	ASTM D5470 Modified
Weight loss	< 1	%	-	ASTM E595 Modified
Elongation	40	%	-	ASTM D412
Breakdown voltage	≥ 10	kV/mm	-	ASTM D149
Volume resistance	1×10 ¹³	Ohm-m	-	ASTM D257
UL certification	V-0	-	-	UL 94
Temperature	-50 to 180	°C	-	-

The TGF_125_AB is available in 0.5 to 8mm thicknesses.

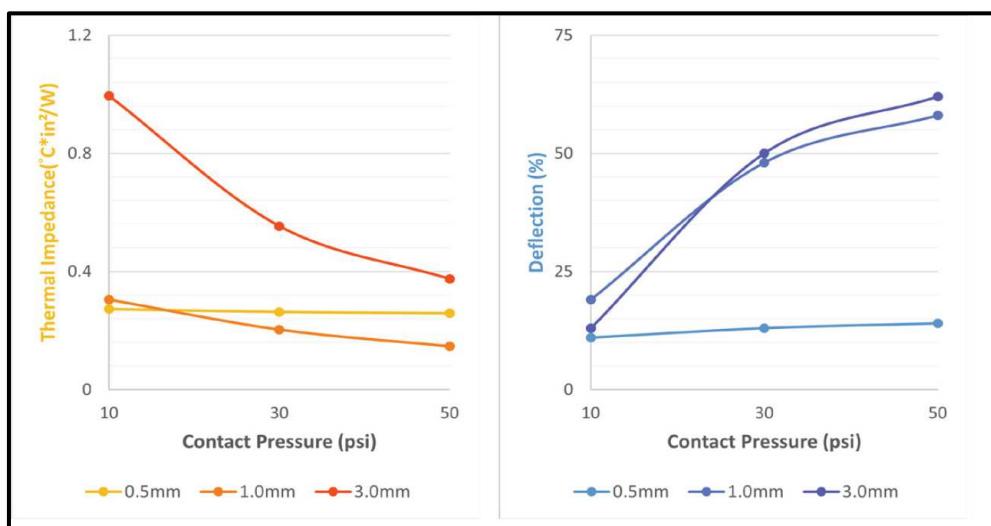

The results were obtained under laboratory conditions and should be considered only as an indication. As AB2E has no control over its customers' equipment and many other factors, it is the user's responsibility to carry out its own tests to ensure that the product corresponds to its needs.

